

ACC-RSU



Economical Ultrasonic Slicing



FOODTOOLS
Industry Leaders in Portion Control

ACC-RSU

Average Speed:

50-100 Products Per Hour

Function:

This half sheet cutting machine is built to slice sticky, difficult to cut, and delicate products. It is capable of cutting in or out of the container. The Ultrasonic blade vibrates at 20 kHz to prevent the product from sticking to the blade, allowing each slice to have a clean quality look. The machine is best for bakeries with mid-size production of half sheet products or that have the ability to cut full sheet products into half sheets to portion on the machine.

Benefits

- Achieve a return on investment through labor savings and improved portion quality and consistency
- Perfectly portion cakes every time
- Small and compact design is perfect for locations with limited space
- Versatile machine slices both round and half sheet products with fast change over
- Ultrasonic technology slices sticky, warm, and delicate products with ease
- Reliable and durable equipment backed by manufacturer's warranty



Economical Ultrasonic Slicing

www.foodtools.com

FoodTools Corporate Office

Santa Barbara, CA U.S.A.
805.962.8383
877.836.6386

FoodTools Central

South Haven, MI U.S.A.
269.637.9969
800.644.2377

FoodTools United Kingdom

Ongar, Essex U.K.
44.1277.364869


FoodTools Asia

Zhuhai, Guangdong China
86.756.2127528

sales@foodtools.com



FOODTOOLS
Industry Leaders in Portion Control

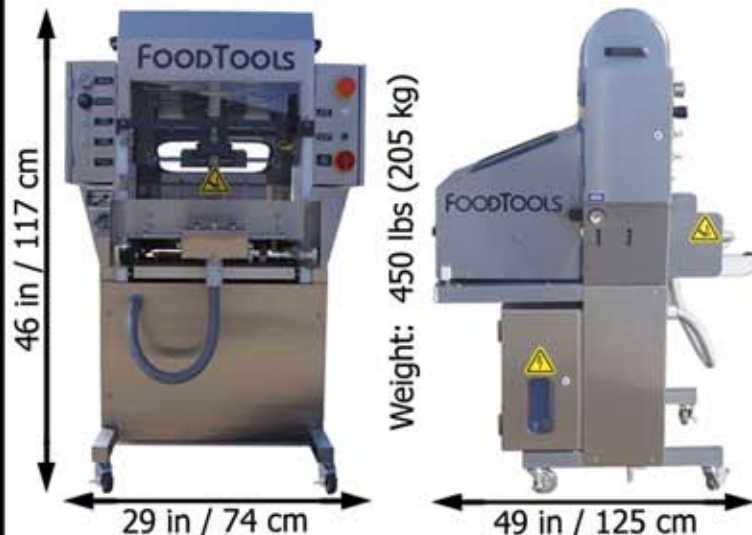

Power:

Compressed Air 4 CFM @ 90 PSI
Electric 208-240V, 13A

Product Size Ranges:

18" (46 cm) Dia Round, 18" Wide Square
23" (58 cm) Diagonal, 3.5" (9 cm) Tall

Portion Size Ranges

Depends On Product

FoodTools machines are manufactured with heavy duty anodized aluminum, stainless steel, and ultra-high molecular weight plastic. The equipment is designed for complete wash down requirements in production facilities.

Specifications are subject to change and are dependent on the product portioned or additional accessories to standard equipment.
© FoodTools - 05/2016

